



WHEELED EXCAVATOR | JS145W/JS160W

Engine power: 93kW (125hp) Bucket capacity: 0.265 – 0.995m³ Operating weight: 14,175 – 18,218kg

JCB

STRENGTH INSIDE AND OUT.

BEFORE YOU BUY AN EXCAVATOR, YOU NEED TO KNOW IT'S GOING TO BE TOUGH ENOUGH TO PERFORM ANY JOB YOU ASK OF IT. FORTUNATELY, WITH A JCB JSI45W/I60W, STRENGTH AND DURABILITY COME AS STANDARD.



1



2

Boom and dipper.

- 1 A JSI45W and I60W's reinforced boom and dipper is made of high tensile strength steel, with single piece wrapper plates and internal baffle plates for long life durability.
- 2 Our advanced manufacturing and assembly processes produce high precision and quality assembled components.

Componentry.

- 3 Proven reliability JCB engines are tried and tested. We've built 200,000 DIESELMAX engines since 2004 and we've tested our latest EcoMAX T4i/Stage IIIB engine for 110,000 hours in 70 different machines across the toughest applications and environments.
- 4 JCB JSI45W/I60W's boast the best components in the industry, that includes a JCB engine, Kawasaki pumps, Kayaba valve blocks and a choice of ZF or JCB axles.



3



4

We use Finite Element Analysis with extensive rig and endurance testing to make key components last longer.

Structural strength.

5 Our heavy-duty axles, dozers and stabilisers are designed for the toughest of applications. Available in a wide range of configurations, ensuring that it can be tailored to suit the job at hand.

6 A closed box section revolving frame increases strength and reduces stress. It's also highly resistant to impact damage.

7 The high-strength rigid upper frame provides maximum durability and support.

8 Our stiff, durable door design gives great strength and rigidity.

UNEARTHED: KEY FACT

The JS145W/160W is available with either a mono or two piece boom.

**5****6****7****8**

MAXIMUM PRODUCTIVITY, MINIMUM SPEND.

IT'S MORE IMPORTANT THAN EVER TO SAVE MONEY AND TIME; THE NEW JCB JS145W/I60W WITH THE NEW ECOMAX T4i ENGINES ARE DESIGNED TO WORK IN HARMONY TO DELIVER OUR MOST PRODUCTIVE AND EFFICIENT WHEELED EXCAVATOR.

Versed in versatility.

1 JCB's quickhitch system makes attachment changing fast and easy and is purpose-designed for the JS range. For ultra versatility, JCB offers a full list of auxiliary pipework options including hammer, auxiliary and low flow.



2 The hydraulic raised cab option enables the raising of the operating station up to 2.3m above the standard machine. This enables the operator to see into higher sided containers that are being loaded, minimising damage, maximising productivity and improving site safety.

3 For the optimum in productivity, the JS145W and JS160W can be fitted with a tiltrotator for additional 45 degree tilt and 360 degree rotation between the arm and attachment.

Our innovative tiltrotator ready installation provides a dedicated flow independent of other hydraulic demands. Combined with purpose designed joysticks which include steering controls, this provides unrivalled tiltrotator performance.



Lifting, excavating, grading, unloading or with attachments, the JS145W/160W is a multi-work tool designed to be more productive by being able to cover a wide range of tasks with ease and precision.



Upping output.

- 4** To complement the smooth and consistent drive, the JS145W/160W come as standard with forward/neutral/reverse controls, conveniently located on the right hand joystick
- 5** JCB's innovative hydraulic regeneration system means oil is recycled across the cylinders for faster cycle times and reduced fuel consumption. Advanced hydraulic technology, optimised hydraulic pump settings and enhanced design of electronic management software gives optimum fuel efficiency

The efficient excavator.

6 JCB's new EcoMAX T4i/Stage IIIB engine uses 10% less fuel than our Tier 3 units, saving you money. This is partly due to the fact that EcoMAX produces high torque at just 1500–1600 rpm, making for improved fuel-efficient matching of the hydraulics.

7 The JS145W/160W's variable power bands allow you to tailor performance and therefore maximise efficiency.

8 A new proportional control system for the engine cooling fan enables optimised fan speed, reducing noise pollution caused by unnecessary air flow, helping to reduce fuel consumption.



A COMFORTABLE FAVOURITE.

WE'VE DESIGNED THE JCB JSI45W/I60W TO BE VERSATILE, COMFORTABLE, ERGONOMIC AND INTUITIVE TO OPERATE. WHICH IS GOOD FOR YOUR OPERATORS BUT EVEN BETTER FOR YOU; AFTER ALL, GREAT EASE OF USE EQUALS GREAT PRODUCTIVITY.

The working environment.

1 The JSI45W/I60W offers a quieter working environment inside and out. Because we've reduced noise levels to 72dB(A) internal and 99dB(A) you can use the machine in any location, any time.


The JCB JSI45W/I60W cabs use 6 viscous rubber mounts to minimise noise and vibration.

2 Light, intuitive and smooth controls improve comfort and productivity. Joystick mounted power boost button allows for quick access of extra hydraulic power.

Proportional auxiliary control options offer smooth, precise control, improved multifunctionality and further fuel savings.

3 The robust steering column and controls are independently adjustable so that it's simple to find the perfect operating position.

4 Rearward visibility is excellent thanks to the very compact EcoMAX T4i engine which is innovatively packaged under a low level bonnet.

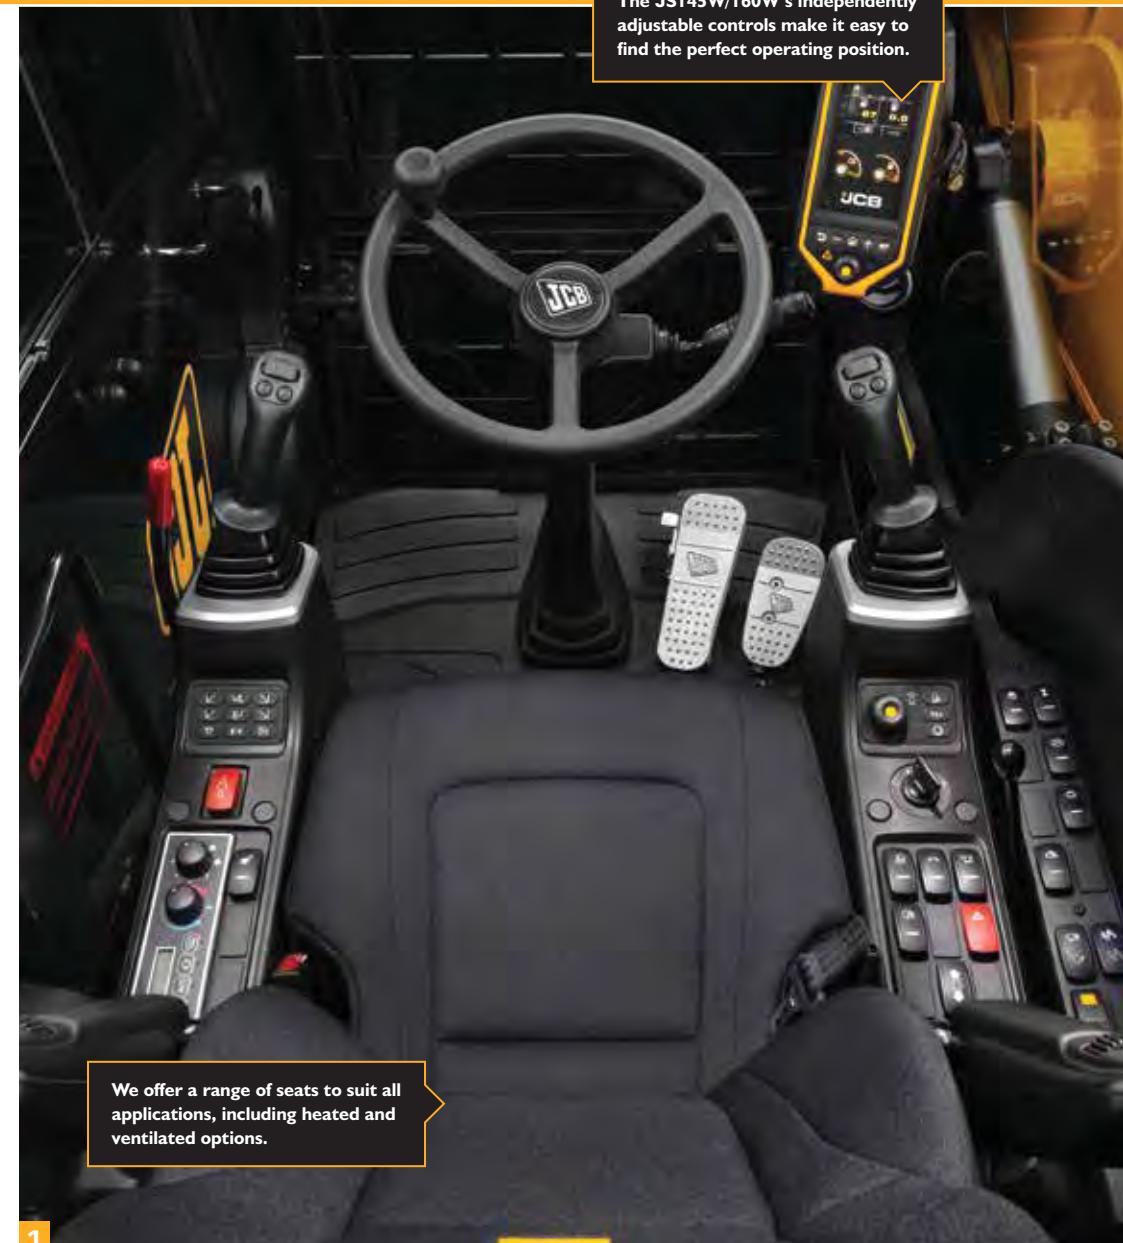



5

Comfortably in control.

5 JCB JS145W/160W have a spacious luggage tray behind the operator's seat. With an auxiliary power socket, ideal for cool boxes.

6 JCB's climate control option offers a precisely controlled cab temperature with fresh or recirculated air. Demisting/defrosting functions keep the front window clear.

7 Work mode selection is done via the rotary throttle control, allowing the operator simple, quick and easy selection from one dial.

8 Conveniently located dozer and stabiliser controls coupled with smooth and responsive joysticks offer great control of the 145W/160Ws allowing for maximum productivity and ease of use.

9 The standard 7" full colour multi function display is easy to read in all light conditions and provides instant access to information on the machine operation. With customisable home screens the operator can choose what information they want to see.



6



7




8



The JS145W/160W's joystick mounted power boost button gives extra hydraulic power fast.

A large laminated glass roof and window gives the JS145W/160W optimum visibility when working at height.

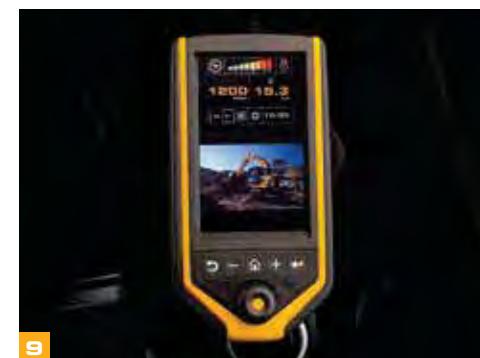

9



9

LESS SERVICING, MORE SERVICE.

WE'VE DESIGNED JCB JS145W/I60W TO BE LOW MAINTENANCE AND EASILY SERVICEABLE. WHICH MAKES THEM AFFORDABLE, EFFICIENT AND HIGHLY PRODUCTIVE. HELPING YOU GET THE BEST SERVICE FROM YOUR MACHINE.



1



(A) Hydraulics oil filters (B) Fuel filters

Easy does it.

- 1 Our innovative recalibration option allows EcoMAX to run on lower grade fuels. This means the JS145W/I60W can be resold across different territories, which improves residuals.
- 2 The filters on a JCB JS145W/I60W (engine oil, hydraulic oil and fuel) are centrally located for fast, easy servicing.
- 3 The easily located air filter makes removal and inspection simple. Because they're mounted side by side, the engine radiator, hydraulic cooler and intercooler can be serviced individually yet easily cleaned.



By using graphite impregnated bronze bushes, we've reduced the JS145W/I60W's boom and dipper greasing intervals to 1000 hours for normal applications.

SERVICE INTERVALS	
Engine oil and oil filter	Every 500 hours
Hydraulic oil	Every 5000 hours
Hydraulic oil filter	Every 1000 hours



3

Here to help.


4 The JCB JS145W/160W as standard are fitted with a single point grease system which is conveniently located at ground level for ease of access and use.

5 We've eliminated the need for a visibowl style pre-cleaner on the JS145W/160W with our optional scavenger filtration system. This uses suction from the cooling fan to remove heavier particles from the induction system, helping to extend your air filter change intervals.

Because the EcoMAX engine doesn't need exhaust after treatment, it doesn't require costly low ash engine oils. Unlike most Tier 4i engines, JCB EcoMAX doesn't use a Diesel Particulate Filter (DPF) or SCR, saving you additional running costs.

6 JCB JS145W/160W bonnets open and close easily with gas-assisted cylinders, and the service bays are large and wide for good access.

7 JCB's NEW In-Cab Monitor checks engine oil levels and system errors on start-up.

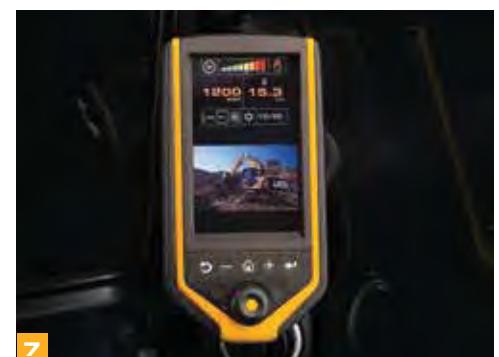


THE SAFE CHOICE.

ON-SITE SAFETY IS CRUCIAL, SO WE'VE DESIGNED THE JSI45W/I60W TO INCORPORATE AS MANY CUTTING EDGE SAFEGUARDS AS POSSIBLE. IN SHORT, YOUR OPERATORS ARE IN SAFE HANDS.

Safety as standard.

- 1 Steps and platforms have anti-slip punched steel plates for optimum grip, even in wet or icy conditions. Bolt-on plates have recessed bolts to reduce trip hazard.
- 2 JCB's JSI45/I60W come as standard with a rear-view camera displaying an uninterrupted backwards view on an in-cab 7" colour monitor. An optional side view camera can also be fitted to further improve the field of vision.
- 3 JCB JSI45W/I60W bonnets open front to rear for easy and safe engine access.
- 4 JCB's 2GO system fully isolates hydraulic functions to avoid unintended movements. Our start function means a JCB JSI45W/I60W can only be moved when in a safe condition via two separate inputs with the footbrake pressed.

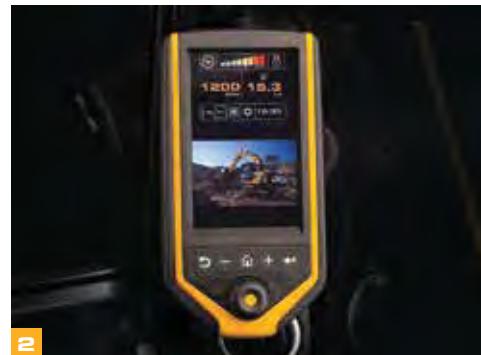

Visibly better.

- 5** JCB JS145W/160W have a large glass area and low bonnet line for superb all round visibility.
- 6** The JCB JS145W/160W is equipped with a full set of side and rear view mirrors for all-round visibility and safety compliance.
- 7** Optional safety rails provide protection against falls from height for any operatives carrying out activities whilst on the upper structure of the vehicle.
- 8** There's no need to climb onto the JS145W/160W to check oil levels; all routine servicing can be done from ground level.
- 9** Choose the LED work lights for an even better field of vision for the operator over standard work lights.
- 10** For extra peace of mind, JCB JS145W/160W cabs are available with an integral rollover protection structure (ROPS). It's easy to fit JCB's FOPS (Falling Objects Protection Structure) to a JS145W/160W cab, thanks to standard fitment mounting brackets.


**10****7****8****9**

LIVELINK, WORK SMARTER.

LIVELINK IS AN INNOVATIVE SOFTWARE SYSTEM THAT LETS YOU MANAGE JCB MACHINES REMOTELY – ONLINE, BY EMAIL OR BY MOBILE PHONE. ACCESS EVERYTHING FROM MACHINE ALERTS TO FUEL REPORTS AND HISTORY INFORMATION, WITH ALL DATA STORED AT A SECURE CENTRE.

Productivity and cost benefits

By providing information like idle time monitoring and machine fuel consumption, JCB Livelink helps reduce your fuel usage, saving money and improving productivity. Machine location information can help improve efficiency and perhaps even reduce insurance costs.

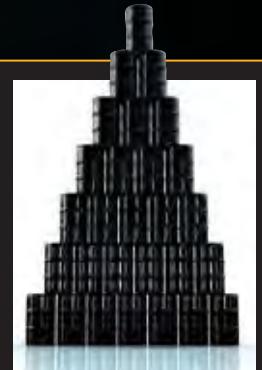

Maintenance benefits

Manage machine maintenance easily – accurate hours monitoring and service alerts improve maintenance planning, while real-time location data helps you manage your fleet. Critical machine alerts and maintenance history records are also available.



Security benefits

Livelink's real-time geofencing alerts tell you when machines move out of predetermined zones, and real-time curfew alerts inform you of unauthorised usage. Further benefits include real-time location information, advanced ECU matching (pairs Livelink with the immobiliser or ECU).



VALUE ADDED.

JCB'S WORLDWIDE CUSTOMER SUPPORT IS FIRST CLASS. WHATEVER YOU NEED AND WHEREVER YOU ARE, WE'LL BE AVAILABLE QUICKLY AND EFFICIENTLY TO HELP MAKE SURE YOUR MACHINERY IS PERFORMING TO ITS FULL POTENTIAL.



1



2




3

1 Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes.

2 The global network of JCB Parts Centres is another model of efficiency; with 15 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.


3 JCB Assetcare offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our maintenance teams around the world charge competitive labour rates, and offer non-obligation quotations as well as fast, efficient insurance repair work.

Note: JCB LIVELINK and JCB ASSETCARE may not be available in your region, so please check with your local dealer.

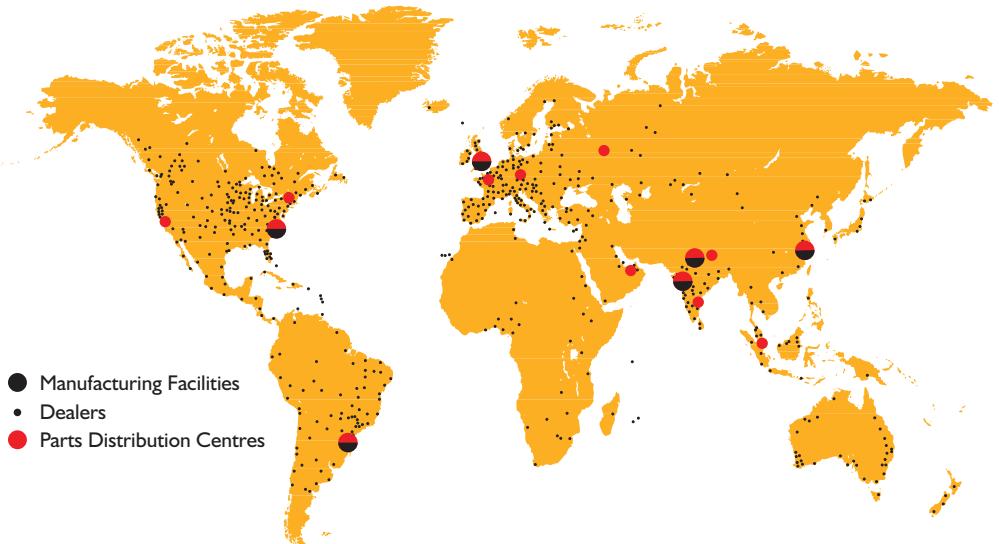

STATIC DIMENSIONS

JS145W MAX. OPERATING WEIGHT: 17610 kg ENGINE POWER: 93 kW (125 hp) **JS160W** MAX. OPERATING WEIGHT: 18218 kg ENGINE POWER: 93 kW (125 hp)

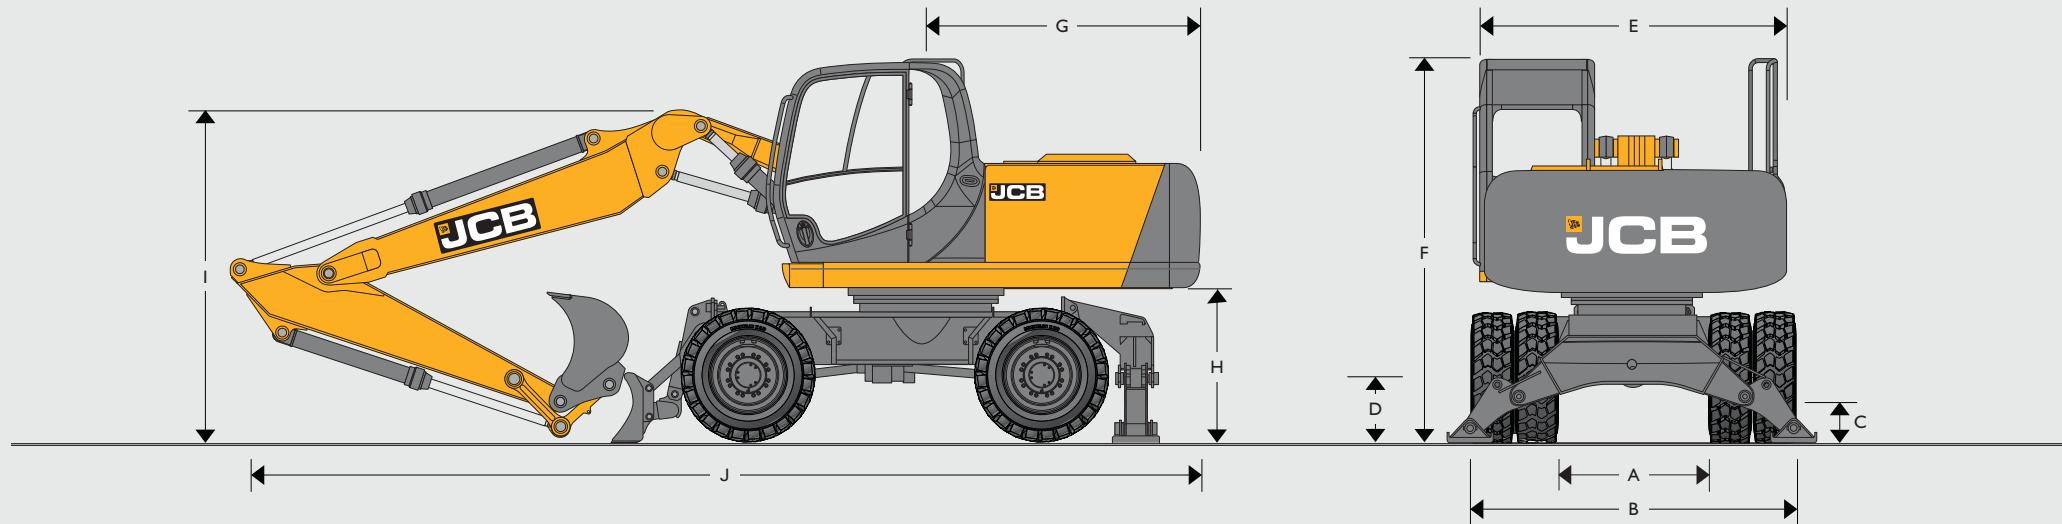


STATIC DIMENSIONS

		JS145W	JS160W
A	Internal width between dual wheels	mm 1330	mm 1330
B	External width over dual wheels	mm 2490	mm 2490
C	Ground clearance	mm 350	mm 350
D	Height to axle centre line dual wheels	mm 498	mm 498
	Height to axle centre line single wheels	mm 519	mm 519
E	Overall width (handrail removed)	mm 2410	mm 2480
F	Height over cab	mm 3161	mm 3195
G	Tail length	mm 2135	mm 2330
H	Clearance under counterweight	mm 1240	mm 1270

JS145W: Monoboom 4.7m



JS160W: Monoboom 5.15m



Dipper length	2.10m	2.50m	3.0m	2.25m	2.70m	3.05m
I Transport boom height	mm 3040	mm 3040	mm 3040	mm 2765	mm 2765	mm 3240
J Transport length	mm 7665	mm 7685	mm 7715	mm 8285	mm 8275	mm 8446


JS145W: TAB 5.0m

JS160W: TAB 4.97m




Dipper length	2.10m	2.50m	3.0m	2.25m	2.70m	3.05m
I Transport boom height	mm 3040	mm 3040	mm 3040	mm 2806	mm 2874	mm 3136
J Transport length	mm 7395	mm 7735	mm 7975	mm 8263	mm 8258	mm 8223

CHASSIS OPTIONS – JS145W/JS160W

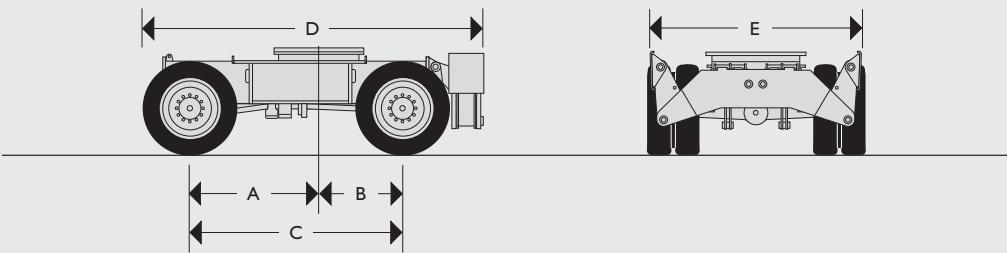


STABILISERS REAR

A	Centre of slew ring to front axle	mm	1500
B	Centre of slew ring to rear axle	mm	1000
C	Wheelbase	mm	2500
D	Length including rear stabilizers	mm	3950
E	Width over stabilizers (raised)	mm	2480

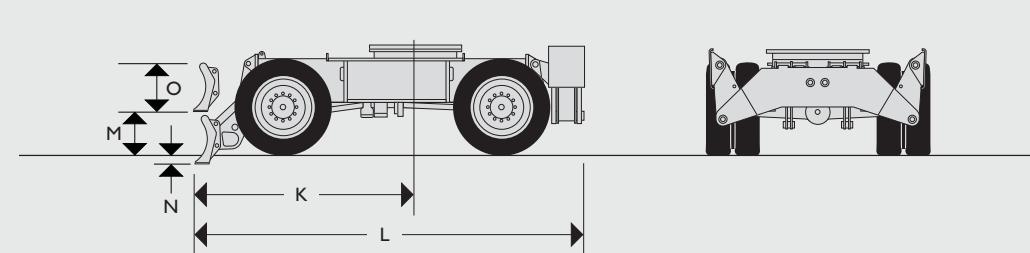


DOZER FRONT STABILISER

K	Centre of slew ring to front dozer blade (lowered)	mm	2530
L	Length including stabilizers and dozer blade (raised)	mm	4460
M	Ground level to bottom of front dozer blade (raised)	mm	450
N	Dozer blade dig depth	mm	130
O	Dozer blade height	mm	500

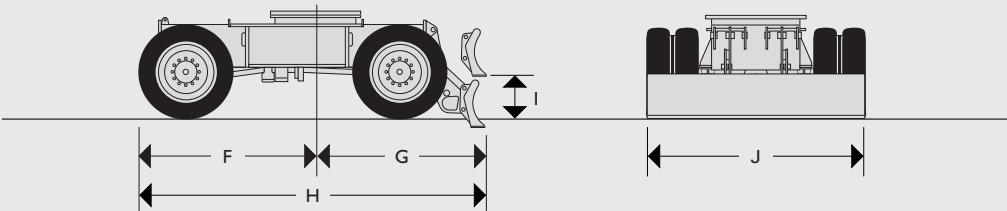

DOZER REAR

F	Centre of slew ring to face of front tyre	mm	1990
G	Centre of slew ring to rear dozer blade (lowered)	mm	2090
H	Length including rear dozer blade (raised)	mm	4050
I	Ground level to bottom of rear dozer blade (raised)	mm	450
J	Dozer blade width	mm	2480

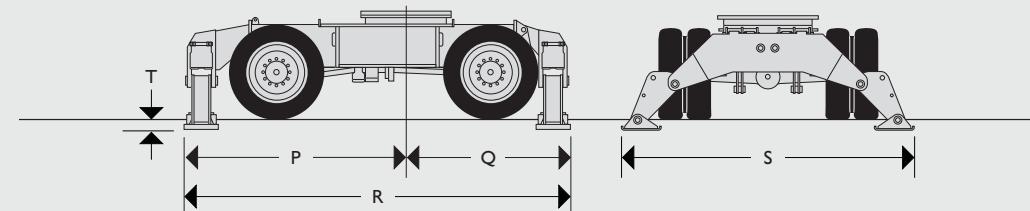

STABILISERS FRONT & REAR

P	Centre of slew ring to front stabilizers	mm	2520
Q	Centre of slew ring to rear stabilizers	mm	1960
R	Length including front and rear stabilizers	mm	4480
S	Width over stabilizers (lowered)	mm	3550
T	Stabilizer lift height	mm	130

ENGINE – JS145W/JS160W

Model	JCB EcoMAX 444 TCA-99 Eu Stage IIIB, EPA Tier 4 interim compliant.
Type	Water cooled, 4-stroke, 4-cylinder in-line, direct injection, turbocharged diesel.
Rated power (ISO14396)	93kW (125hp).
Piston displacement	4.399 litres.
Injection	Electronic injection.
Air filtration	Dry element with secondary safety element and in cab warning indicator.
Cooling	Large capacity radiator.
Starting system	24 volt – 4kW.
Batteries	2 x 12 volt Heavy Duty.
Alternator	24 volt 55 amp.
Refuelling pump	Electric type.

SWING SYSTEM

Drive train	Axial piston motor and planetary reduction final drive.
Swing brake	Hydraulic braking plus automatic spring applied disc type parking brake.
Swing speed	JS145W: 12.6rpm JS160W: 8.9rpm
Swing gear	Large diameter, internally toothed fully sealed grease bath lubricated.
Swing lock	Multi position switchable brake and mechanical lock.

EXCAVATOR END

Monoboom and triple articulating boom available along with a choice of dipper lengths to suit the requirements of reach, dig-depth, loadover height, tearouts and site versatility. Reserve strength is built into the fully welded structures for hydraulic hammer and other arduous operations.

Fabricated bucket tipping links are provided with a choice of lift points.

Strong, durable construction, large cross sections and multi plate fabrications to withstand high stress applications.

CHASSIS

Chassis options				
Dozer blade	Front or rear pin mount.			
Stabilisers	Front or rear pin mount, independently operable – plus combinations.			
Grab stowage	Heavy duty, pin mounted stowage bar.			
Axes	Four wheel drive.			
Axle load capacity	JS145W: 26 tonnes. JS160W: 32 tonnes.			
Axle oscillation	+/- 8.5 degrees.			
Ground clearance	350mm.			
Transmission	Hydrostatic drive via piston motor and powershift transmission.			
Travel speed	JS145W			
	Creep speed	3.1kph (JCB)	3.1kph (ZF)	2.77kph (JCB)
	Low ratio	8.1kph (JCB)	7.9kph (ZF)	7.0kph (JCB)
	High ratio	33.5kph (JCB)	32.3kph (ZF)	28.4kph (JCB)
				27.6kph (ZF)
Drawbar pull	JS160W			
		86.6 kN (JCB Axle), 87.8 kN (ZF Axle)	99.7 kN (JCB Axle), 102.5 kN (ZF Axle)	
Steering	Fully hydraulic system.			
Turning radius				
To outside of tyres	5.45m.			
To outer edge of front mounted dozer blade	6.06m.			
Brakes	All hydraulic, dual circuit brake system.			
Parking brake	Built into the transmission.			
Gradability	35° 70% max. continuous.			

TYRES

	Twins	Single	Flotation
	10.00 x 20 tyres (16PR) with spacer ring	18R x 19.5 tyres (Radials)	600/40 x 22.5

OPERATING WEIGHTS

Chassis										
	JS145W	JS160W	JS145W	JS160W	JS145W	JS160W	JS145W	JS160W	JS145W	JS160W
	14286kg	14758kg	14992kg	15511kg	15598kg	16117kg	16304kg	16823kg	16910kg	17367kg
	14986kg	15594kg	15692kg	16300kg	16298kg	17087kg	17004kg	17612kg	17610kg	18218kg
JS145W	Machine equipped with 3.0m arm, excavating bucket and dual wheels. For single wheels subtract 400kg. For 2.5m arm subtract 72kg. For 2.1m arm subtract 111kg.									
JS160W	Machine equipped with 3.05m arm, excavating bucket and dual wheels. For single wheels subtract 400kg. For 2.7m arm subtract 47kg. For 2.25m arm subtract 103kg.									

BUCKET AND ARM COMBINATION

		No quickhitch fitted			Quickhitch fitted*				
JS145W Mono and TAB									
Arm length	2.1m	2.5m	3.0m	2.1m	2.5m	3.0m		Bucket weight	
GP bucket 610mm 0.34m ³	□	□	□	□	□	□		368kg	
GP bucket 762mm 0.46m ³	□	□	□	□	■	■		460kg	
GP bucket 914mm 0.59m ³	□	□	■	●	●	×		511kg	
GP bucket 1067mm 0.72m ³	□	■	■	●	×	×		579kg	
GP bucket 1219mm 0.85m ³	■	■	●	×	×	×		625kg	
JS160W mono									
Arm length	2.25m	2.7m	3.0m	2.25m	2.7m	3.0m		Bucket weight	
GP bucket 610mm 0.34m ³	□	□	□	□	□	□		368kg	
GP bucket 762mm 0.46m ³	□	□	■	■	■	●		460kg	
GP bucket 914mm 0.59m ³	■	■	●	●	●	×		511kg	
GP bucket 1067mm 0.72m ³	●	●	×	×	×	×		579kg	
GP bucket 1219mm 0.85m ³	×	●	×	×	×	×		625kg	
JS160W Tab									
Arm length	2.25m	2.7m	3.0m	2.25m	2.7m	3.0m		Bucket weight	
GP bucket 610mm 0.34m ³	□	□	□	□	□	□		368kg	
GP bucket 762mm 0.46m ³	□	□	□	■	■	□		460kg	
GP bucket 914mm 0.59m ³	■	■	□	●	●	■		511kg	
GP bucket 1067mm 0.72m ³	●	●	■	×	×	●		579kg	
GP bucket 1219mm 0.85m ³	●	●	●	×	×	×		625kg	

Notes: Bucket compatibility based upon lift values (ISO 10567) for a free on wheels machine, compatibility will change based upon chassis options.

□ = Suitable for general excavating (materials up to 2000kg/cu.m).

■ = Suitable for light excavating (materials up to 1600kg/cu.m).

● = Suitable for grading & loading materials up to 1200kg/cu.m).

✗ = Not recommended

* Bucket capacity using JCB quickhitch only (quickhitch = 186kg).


SERVICE CAPACITIES

		JS145W	JS160W
Fuel tank	litres	253	310
Engine coolant	litres	19.7	19.5
Engine oil	litres	20.4	20.4
Swing reduction gear	litres	2.2	6
Hydraulic system	litres	124	124
Hydraulic tank	litres	73	73
Transmission	litres	2.5	2.5
Axle differentials (each)	litres	Rear 12, Front 14	Rear 12, Front 14
Axle hubs (each)	litres	2.0	2.0

MAIN HYDRAULIC SYSTEM

System	Open centred, negative control hydraulic system with twin variable flow piston pumps providing flow-on-demand for maximum efficiency.
Main pumps	2 variable displacement axial piston type.
Maximum flow	JS145W: 2 x 123 l/min. JS160W: 2 x 130 l/min.
Main circuit pressure	314 bar.
With power boost	343 bar.
Servo pump	Gear type.
Maximum flow	JS145W: 19 l/min. JS160W: 22 l/min.
Servo pressure	40 bar.
Optional circuits	
Hammer	Includes automatic engine speed setting and return filter.
Maximum flow	JS145W: 119 l/min. JS160W: 126 l/min.
Maximum pressure	314 bar (pre-set to 210 bar).
Aux double acting	
Maximum flow	JS145W: 123 l/min. JS160W: 130 l/min.
Maximum pressure for grab ram operation	314 (343) bar.
Low flow pipework	JS145W: 34 l/min. JS160W: 36 l/min.
Hydraulic cylinders	Hardened, chromed piston rods and end cushioning on boom, dipper and bucket crowd cylinder.
Filtration	
In tank	150 micron, suction strainer.
Main return line	10 micron, fibreform element.
Pilot line	10 micron, paper element.
Hydraulic hammer return	10 micron, reinforced microform element.
Cooling	Worldwide cooling is provided by a single faced engine water, hydraulic oil and intercooler with swing forwards air conditioning condenser for easy cleaning.

WORKING RANGES – JS145W

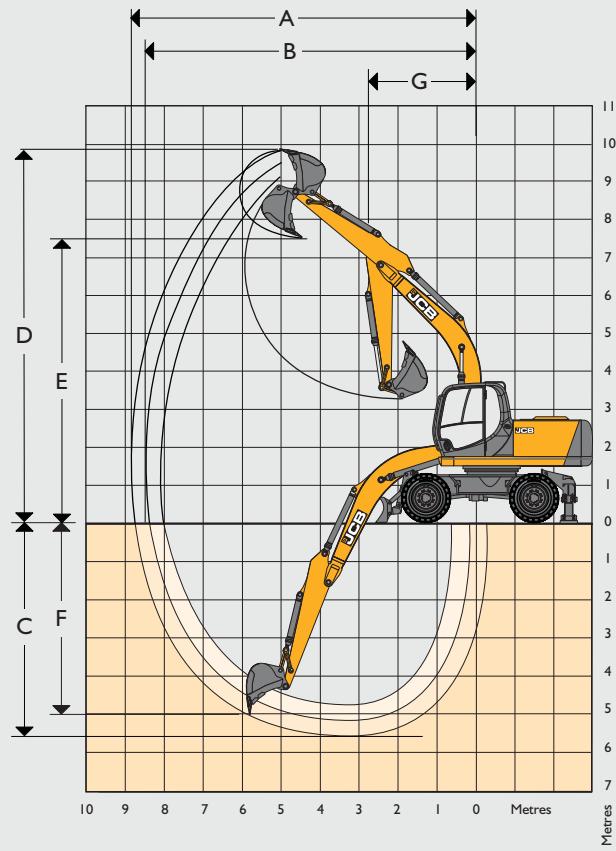


4.7m Monoboom

		2.10m	2.50m	3.00m
A	Max digging reach	mm	7980	8350
B	Max digging reach (on ground)	mm	7745	8125
C	Max digging depth	mm	4775	5175
D	Max digging height	mm	9185	9455
E	Max loadover height	mm	6780	7050
F	Max vertical wall cut depth	mm	4200	4600
G	Min swing radius	mm	2050	2050
Bucket rotation			182°	182°
Dipper tearout	kgf	8843	7430	6190
Dipper tearout with boost	kgf	9570	8040	6700
Bucket tearout	kgf	7720	7720	7720
Bucket tearout with boost	kgf	8350	8350	8350

5.0m T.A.B.

		2.10m	2.50m	3.00m
A	Max digging reach	mm	8360	8750
B	Max digging reach (on ground)	mm	8140	8525
C	Max digging depth	mm	5020	5425
D	Max digging height	mm	9675	10000
E	Max loadover height	mm	7275	7575
F	Max vertical wall cut depth	mm	4240	4625
G	Min swing radius	mm	2490	2575
Bucket rotation			182°	182°
Dipper tearout	kgf	8843	7430	6190
Dipper tearout with boost	kgf	9570	8040	6700
Bucket tearout	kgf	7720	7720	7720
Bucket tearout with boost	kgf	8350	8350	8350

WORKING RANGES – JS160W

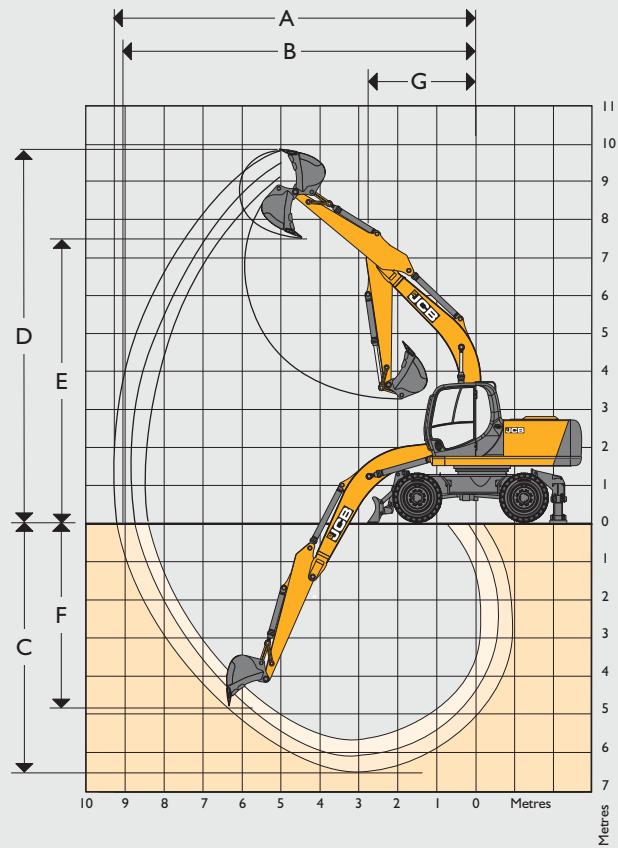

5.15m Monoboom

		2.25m	2.70m	3.05m
A	Max digging reach	mm	8592	8974
B	Max digging reach (on ground)	mm	8386	8776
C	Max digging depth	mm	5682	6120
D	Max digging height	mm	9102	9237
E	Max loadover height	mm	6636	6805
F	Max vertical wall cut depth	mm	3826	4178
G	Min swing radius	mm	3019	2961
Bucket rotation		183°	183°	183°
Dipper tearout	kgf	10128	8440	7470
Dipper tearout with boost	kgf	10990	9160	8100
Bucket tearout	kgf	10400	10400	10400
Bucket tearout with boost	kgf	10740	10740	10740

4.97m T.A.B.

		2.25m	2.70m	3.05m
A	Max digging reach	mm	8600	9025
B	Max digging reach (on ground)	mm	8400	8850
C	Max digging depth	mm	5300	5750
D	Max digging height	mm	9700	10000
E	Max loadover height	mm	7000	7325
F	Max vertical wall cut depth	mm	4450	4900
G	Min swing radius	mm	2725	2675
Bucket rotation		183°	183°	183°
Dipper tearout	kgf	9035	7530	6665
Dipper tearout with boost	kgf	9600	8100	7235
Bucket tearout	kgf	10400	10400	10400
Bucket tearout with boost	kgf	10740	10740	10740

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, REAR DOZER, NO BUCKET.

Reach	3m		4m		5m		6m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	mm						
6.0m			3240*	3240*	3350*	3350*			2810*	2810*
5.0m	3810*	3810*	3540*	3540*	3400*	3400*	2750*	2600	2660*	2590
4.0m	5090*	5090*	4150*	4150*	3690*	3410	3480*	2580	2620*	2310
3.0m	6840*	6840*	4950*	4550	4110*	3300	3670*	2530	2650*	2150
2.0m			5710*	4360	4540*	3200	3900*	2480	2740*	2080
1.0m	4750*	4750*	6220*	4230	4880*	3110	4090*	2430	2920*	2080
0m	7050*	6410	6420*	4160	5050*	3060	4170*	2400	3200*	2170
- 1.0m	8310*	6430	6330*	4150	5010*	3050	4020*	2400	3680*	2360
- 2.0m	7630*	6490	5900*	4180	4630	3070			4010*	2730
- 3.0m	6420*	6420*	4920*	4270					4010*	3550
										4592

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, REAR STABILISERS, NO BUCKET.

Reach	3m		4m		5m		6m		Capacity at Max Reach	
Load Point Ht.	kg	mm								
6.0m			3240*	3240*	3350*	3350*			2810*	2810*
5.0m	3810*	3810*	3540*	3540*	3400*	3400*	2750*	2750*	2660*	2660*
4.0m	5090*	5090*	4150*	4150*	3690*	3690*	3480*	2920	2620*	2610
3.0m	6840*	6840*	4950*	4950*	4110*	3750	3670*	2870	2650*	2440
2.0m			5710*	5020	4540*	3640	3900*	2810	2740*	2360
1.0m	4750*	4750*	6220*	4880	4880*	3560	4090*	2760	2920*	2370
0m	7050*	7050*	6420*	4810	5050*	3500	4170*	2730	3200*	2460
- 1.0m	8310*	7600	6330*	4800	5010*	3490	4020*	2730	3680*	2680
- 2.0m	7630*	7630*	5900*	4830	4630*	3520			4010*	3110
- 3.0m	6420*	6420*	4920*	4920*					4010*	4010*
										4592

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	3m		4m		5m		6m		Capacity at Max Reach	
Load Point Ht.	kg	mm								
6.0m			3240*	3240*	3350*	3350*			2810*	2810*
5.0m	3810*	3810*	3540*	3540*	3400*	3400*	2750*	2750*	2660*	2660*
4.0m	5090*	5090*	4150*	4150*	3690*	3690*	3480*	3480*	2620*	2620*
3.0m	6840*	6840*	4950*	4950*	4110*	4110*	3670*	3630	2650*	2650*
2.0m			5710*	5710*	4540*	4540*	3900*	3570	2740*	2740*
1.0m	4750*	4750*	6220*	6220*	4880*	4560	4090*	3510	2920*	2920*
0m	7050*	7050*	6420*	6310	5050*	4510	4170*	3480	3200*	3130
- 1.0m	8310*	8310*	6330*	6290	5010*	4490	4020*	3480	3680*	3420
- 2.0m	7630*	7630*	5900*	5900*	4630*	4520			4010*	3980
- 3.0m	6420*	6420*	4920*	4920*					4010*	4010*
										4592



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, FRONT STABILISER, REAR STABILISER, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			3240*	3240*	3350*	3350*			2810*	2810*	5368
5.0m	3810*	3810*	3540*	3540*	3400*	3400*	2750*	2750*	2660*	2660*	6011
4.0m	5090*	5090*	4150*	4150*	3690*	3690*	3480*	3480*	2620*	2620*	6434
3.0m	6840*	6840*	4950*	4950*	4110*	4110*	3670*	3670*	2650*	2650*	6679
2.0m			5710*	5710*	4540*	4540*	3900*	3900*	2740*	2740*	6767
1.0m	4750*	4750*	6220*	6220*	4880*	4880*	4090*	3880	2920*	2920*	6704
0m	7050*	7050*	6420*	6420*	5050*	5010	4170*	3840	3200*	3200*	6485
- 1.0m	8310*	8310*	6330*	6330*	5010*	4990	4020*	3850	3680*	3680*	6093
- 2.0m	7630*	7630*	5900*	5900*	4630	4630*			4010*	4010*	5490
- 3.0m	6420*	6420*	4920*	4920*					4010*	4010*	4592

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, REAR DOZER, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	mm						
6.0m			2850*	2850*	2990*	2990*			2990*	2990*	5828
5.0m			3160*	3160*	3110*	3110*	3130*	2770	2190*	2190*	6424
4.0m	4420*	4420*	3780*	3780*	3440*	3440*	3260*	2730	2160*	2160*	6821
3.0m	6110*	6110*	4600*	4600*	3880*	3490	3490*	2680	2180*	2090	7053
2.0m	7700*	7040	5430*	4620	4360*	3370	3760*	2610	2260*	2030	7136
1.0m	6200*	6200*	6050*	4460	4750*	3280	4000*	2550	2400	2030	7076
0m	7380*	6710	6380*	4370	5010*	3210	4150*	2510	2620*	2100	6869
- 1.0m	8560*	6700	6410*	4340	5060*	3180	4130*	2500	2970*	2260	6501
- 2.0m	8030*	6740	6130*	4350	4840*	3190			3590*	2560	5940
- 3.0m	7060*	6840	5420*	4410	4090*	3260			3900*	3160	5124

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, REAR STABILISERS, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	mm						
6.0m			2850*	2850*	2990*	2990*			2290*	2290*	5828
5.0m			3160*	3160*	3110*	3110*	3130*	3000	2190*	2190*	6424
4.0m	4420*	4420*	3780*	3780*	3440*	3440*	3260*	2960	2160*	2160*	6821
3.0m	6110*	6110*	4600*	4600*	3880*	3800	3490*	2900	2180*	2180*	7053
2.0m	7700*	7040	5430*	5100	4360*	3680	3760*	2840	2260*	2200	7136
1.0m	6200*	6200*	6050*	4930	4750*	3590	4000*	2780	2400	2200	7076
0m	7380*	7380*	6380*	4840	5010*	3520	4150*	2740	2620*	2280	6869
- 1.0m	8560*	7590	6410*	4800	5060*	3490	4130*	2720	2970*	2450	6501
- 2.0m	8030*	7640	6130*	4820	4840*	3500			3590*	2780	5940
- 3.0m	7060*	7060*	5420*	4880	4090*	3560			3900*	3450	5124

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, FRONT DOZER, REAR STABILISER, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			2850*	2850*	2990*	2990*			2290*	2290*	5828
5.0m			3160*	3160*	3110*	3110*	3130*	3130*	2190*	2190*	6424
4.0m	4420*	4420*	3780*	3780*	3440*	3440*	3260*	3260*	2160*	2160*	6821
3.0m	6110*	6110*	4600*	4600*	3880*	3880*	3490*	3490*	2180*	2180*	7053
2.0m	7700*	7700*	5430*	5430*	4360*	4360*	3760*	3590	2260*	2260*	7136
1.0m	6200*	6200*	6050*	6050*	4750*	4590	4000*	3530	2400*	2400*	7076
0m	7380*	7380*	6380*	6330	5010*	4520	4150*	3490	2620*	2620*	6869
-1.0m	8560*	8560*	6410*	6290	5060*	4490	4130*	3470	2970*	2970*	6501
-2.0m	8030*	8030*	6130*	6130	4840*	4500			3590*	3590*	5940
-3.0m	7060*	7060*	5420*	5420*	4090*	4090*			3900*	3900*	5124

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, FRONT STABILISER, REAR STABILISER, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			2850*	2850*	2990*	2990*			2290*	2290*	5828
5.0m			3160*	3160*	3110*	3110*	3130*	3130*	2190*	2190*	6424
4.0m	4420*	4420*	3780*	3780*	3440*	3440*	3260*	3260*	2160*	2160*	6821
3.0m	6110*	6110*	4600*	4600*	3880*	3880*	3490*	3490*	2180*	2180*	7053
2.0m	7700*	7700*	5430*	5430*	4360*	4360*	3760*	3760*	2260*	2260*	7136
1.0m	6200*	6200*	6050*	6050*	4750*	4750*	4000*	3890*	2400*	2400*	7076
0m	7380*	7380*	6380*	6380*	5010*	5010*	4150*	3850*	2620*	2620*	6869
-1.0m	8560*	8560*	6410*	6410*	5060*	4990	4130*	3830	2970*	2970*	6501
-2.0m	8030*	8030*	6130*	6130	4840*	4840*			3590*	3590*	5940
-3.0m	7060*	7060*	5420*	5420*	4090*	4090*			3900*	3900*	5124

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, REAR DOZER, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	mm						
6.0m					2590*	2590*	2800*	2730	2120*	2120*	6380
5.0m			2670*	2670*	2750*	2750*	2810*	2720	2050*	2050*	6928
4.0m			3290*	3290*	3100*	3100*	2990*	2680	2030*	1960	7297
3.0m	5220*	5220*	4130*	4130*	3580*	3420	3270*	2610	2050*	1850	7514
2.0m	6950*	6950*	5020*	4530	4100*	3290	3580*	2540	2120*	1790	7593
1.0m	7730*	6640*	5770*	4350	4560*	3190	3860*	2740	2240*	1790	7536
0m	7680*	6480	6250*	4230	4900*	3100	4080*	2420	2430*	1840	7342
-1.0m	8720*	6420	6430*	4170	5060*	3060	4170*	2390	2720*	1950	6999
-2.0m	8400*	6430	6320*	4150	4990*	3040	4040*	2390	3190*	2170	6483
-3.0m	7680*	6500	5850*	4190	4580*	3070			3720*	2570	5746



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, REAR STABILISERS, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2590*	2590*	2800*	2800*	2120*	2120*	6380
5.0m			2670*	2670*	2750*	2750*	2810*	2810*	2050*	2050*	6928
4.0m			3290*	3290*	3100*	3100*	2990*	2990*	2030*	2030*	7297
3.0m	5220*	5220*	4130*	4130*	3580*	3580*	3270*	2950	2050*	2050*	7514
2.0m	6950*	6950*	5020*	5020*	4100*	3740	3580*	2880	2120*	2030	7593
1.0m	7730*	7730*	5770*	5010	4560*	3630	3860*	2810	2240*	2030	7536
0m	7680*	7650	6250*	4880	4900*	3550	4080*	2760	2430*	2090	7342
- 1.0m	8720*	7600	6430*	4820	5060*	3500	4170*	2720	2720*	2220	6999
- 2.0m	8400*	7610	6320*	4800	4990*	3490	4040*	2720	3190*	2470	6483
- 3.0m	7680*	7680	5850*	4840	4580*	3520			3720*	2930	5746

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, FRONT DOZER, REAR STABILISERS, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2590*	2590*	2800*	2800*	2120*	2120*	6380
5.0m			2670*	2670*	2750*	2750*	2810*	2810*	2050*	2050*	6928
4.0m			3290*	3290*	3100*	3100*	2990*	2990*	2030*	2030*	7297
3.0m	5220*	5220*	4130*	4130*	3580*	3580*	3270*	3270*	2050*	2050*	7514
2.0m	6950*	6950*	5020*	5020*	4100*	4100*	3580*	3580*	2120*	2120*	7593
1.0m	7730*	7730*	5770*	5770*	4560*	4560*	3860*	3560	2240*	2240*	7536
0m	7680*	7680*	6250*	6250*	4900*	4550	4080*	3510	2430*	2430*	7342
- 1.0m	8720*	8720*	6430*	6310	5060*	4500	4170*	3480	2720*	2720*	6999
- 2.0m	8400*	8400*	6320*	6300	4990*	4490	4040*	3470	3190*	3130	6483
- 3.0m	7680*	7680*	5850*	5850*	4580*	4520			3720*	3720*	5746

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS145W MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2590*	2590*	2800*	2800*	2120*	2120*	6380
5.0m			2670*	2670*	2750*	2750*	2810*	2810*	2050*	2050*	6928
4.0m			3290*	3290*	3100*	3100*	2990*	2990*	2030*	2030*	7297
3.0m	5220*	5220*	4130*	4130*	3580*	3580*	3270*	3270*	2050*	2050*	7514
2.0m	6950*	6950*	5020*	5020*	4100*	4100*	3580*	3580*	2120*	2120*	7593
1.0m	7730*	7730*	5770*	5770*	4560*	4560*	3860*	3860*	2240*	2240*	7536
0m	7680*	7680*	6250*	6250*	4900*	4900*	4080*	3870	2430*	2430*	7342
- 1.0m	8720*	8720*	6430*	6430*	5060*	5000	4170*	3840	2720*	2720*	6999
- 2.0m	8400*	8400*	6320*	6320*	4990*	4990	4040*	3830	3190*	3190*	6483
- 3.0m	7680*	7680*	5850*	5850*	4580*	4580*			3720*	3720*	5746

 Lift capacity front and rear.

Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.00M T.A.B., REAR DOZER, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	mm						
6.0m			3260*	3260*	3180*	3180*			2910*	2660*	5868
5.0m	4160*	4160*	3620*	3620*	3330*	3330*	3200*	2580	2720*	2260*	6461
4.0m	5490*	5490*	4250*	4250*	3640*	3350	3320*	2540	2640*	2040	6856
3.0m			5010*	4420	4050*	3220	3530*	2470	2630*	1910	7086
2.0m			5680*	4200	4440*	3090	3760*	2400	2670*	1850	7169
1.0m			6080*	4060	4740*	3000	3940*	2340	2770*	1860	7110
0m			6200*	4010	4880*	2950	4020*	2310	2970*	1930	6903
-1.0m	6980*	6260	6060*	4010	4820*	2940	3930*	2310	3260*	2090	6537
-2.0m	7160*	6340	5650*	4060	4510*	2970			3430*	2380	5980

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.00M T.A.B., REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	mm						
6.0m			3260*	3260*	3180*	3180*			2910*	2910*	5868
5.0m	4160*	4160*	3620*	3620*	3330*	3330*	3200*	2930	2720*	2570	6461
4.0m	5490*	5490*	4250*	4250*	3640*	3640*	3320*	2880	2640*	2320	6856
3.0m			5010*	5010*	4050*	3680	3530*	2810	2630*	2180	7086
2.0m			5680*	4870	4440*	3550	3760*	2740	2670*	2120	7169
1.0m			6080*	4730	4740*	3450	3940*	2690	2770*	2130	7110
0m			6200*	4670	4880*	3400	4020*	2650	2970*	2210	6903
-1.0m	6980*	6980*	6060*	4670	4820*	3390	3930*	2650	3260*	2390	6537
-2.0m	7160*	7160*	5650*	4720	4510*	3420			3430*	2720	5980

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.00M T.A.B., FRONT DOZER, REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			3260*	3260*	3180*	3180*			2910*	2910*	5868
5.0m	4160*	4160*	3620*	3620*	3330*	3330*	3200*	3200*	2720*	2720*	6461
4.0m	5490*	5490*	4250*	4250*	3640*	3640*	3320*	3320*	2640*	2640*	6856
3.0m			5010*	5010*	4050*	4050*	3530*	3530*	2630*	2630*	7086
2.0m			5680*	5680*	4440*	4440*	3760*	3510	2670*	2670*	7169
1.0m			6080*	6080*	4740*	4740*	3940*	3450	2770*	2720	7110
0m			6200*	6180	4880*	4420	4020*	3420	2970*	2830	6903
-1.0m	6980*	6980*	6060*	6060*	4820*	4410	3930*	3410	3260*	3060	6537
-2.0m	7160*	7160*	5650*	5650*	4510*	4440			3430*	3430*	5980



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.00M T.A.B., FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			3260*	3260*	3180*	3180*			2910*	2910*	5868
5.0m	4160*	4160*	3620*	3620*	3330*	3330*	3200*	3200*	2720*	2720*	6461
4.0m	5490*	5490*	4250*	4250*	3640*	3640*	3320*	3320*	2640*	2640*	6856
3.0m			5010*	5010*	4050*	4050*	3530*	3530*	2630*	2630*	7086
2.0m			5680*	5680*	4440*	4440*	3760*	3760*	2670*	2670*	7169
1.0m			6080*	6080*	4740*	4470	3940*	3820	2770*	2770*	7110
0m			6200*	6200*	4880*	4880*	4020*	3780	2970*	2970*	6903
-1.0m	6980*	6980*	6060*	6060*	4820*	4820*	3930*	3780	3260*	3260*	6537
-2.0m	7160*	7160*	5650*	5650*	4510*	4510*			3430*	3430*	5980

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.00M T.A.B., REAR DOZER, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	mm						
6.0m			2930*	2930*	2910*	2910*	2970*	2760	2350*	2350*	6335
5.0m			3290*	3290*	3090*	3090*	2980*	2750	2230*	2170	6886
4.0m	4850*	4850*	3910*	3910*	3420*	3420*	3140*	2690	2170*	1980	7258
3.0m			4690*	4690*	3850*	3410	3380*	2620	2160*	1860	7476
2.0m			5430*	4470	4280*	3280	3640*	2540	2210*	1810	7554
1.0m			5950*	4300	4630*	3170	3860*	2470	2280*	1820	7498
0m	4360*	4360*	6180*	4220	4840*	3100	3990*	2430	2430*	1880	7303
-1.0m	6730*	6510	6160*	4200	4870*	3080	3990*	2410	2660*	2010	6958
-2.0m	7590*	6580	5870*	4220	4680*	3090	3750*	2430	3040*	2240	6438
-3.0m			5240*	4300	4120*	3150			3600*	2820	5455

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.00M T.A.B., REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			2930*	2930*	2910*	2910*	2970*	2970*	2350*	2350*	6335
5.0m			3290*	3290*	3090*	3090*	2980*	2980*	2230*	2230*	6886
4.0m	4850*	4850*	3910*	3910*	3420*	3420*	3140*	2930	2170*	2150	7258
3.0m			4690*	4690*	3850*	3730	3380*	2850	2160*	2030	7476
2.0m			5430*	4950	4280*	3600	3640*	2770	2210*	1970	7554
1.0m			5950*	4780	4630*	3490	3860*	2700	2280*	1980	7498
0m	4360*	4360*	6180*	4690	4840*	3420	3990*	2660	2430*	2040	7303
-1.0m	6730*	6730*	6160*	4670	4870*	3390	3990*	2640	2660*	2190	6958
-2.0m	7590*	7590*	5870*	4700	4680*	3400	3750*	2660	3040*	2450	6438
-3.0m			5240*	4780	4120*	3470			3600*	3100	5455

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.00M T.A.B., FRONT DOZER, REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			2930*	2930*	2910*	2910*	2970*	2970*	2350*	2350*	6335
5.0m			3290*	3290*	3090*	3090*	2980*	2980*	2230*	2230*	6886
4.0m	4850*	4850*	3910*	3910*	3420*	3420*	3140*	3140*	2170*	2170*	7258
3.0m			4690*	4690*	3850*	3850*	3380*	3380*	2160*	2160*	7476
2.0m			5430*	5430*	4280*	4280*	3640*	3540	2210*	2210*	7554
1.0m			5950*	5950*	4630*	4510	3860*	3470	2280*	2280*	7498
0m	4360*	4360*	6180*	6180*	4840*	4440	3990*	3420	2430*	2430*	7303
- 1.0m	6730*	6730*	6160*	6160*	4870*	4410	3990*	3410	2660*	2660*	6958
- 2.0m	7590*	7590*	5870*	5870*	4680*	4420	3750*	3430	3040*	3040*	6438
- 3.0m			5240*	5240*	4120*	4120*			3600*	3600*	5455

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.00M T.A.B., FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m			2930*	2930*	2910*	2910*	2970*	2970*	2350*	2350*	6335
5.0m			3290*	3290*	3090*	3090*	2980*	2980*	2230*	2230*	6886
4.0m	4850*	4850*	3910*	3910*	3420*	3420*	3140*	3140*	2170*	2170*	7258
3.0m			4690*	4690*	3850*	3850*	3380*	3380*	2160*	2160*	7476
2.0m			5430*	5430*	4280*	4280*	3640*	3640*	2210*	2210*	7554
1.0m			5950*	5950*	4630*	4630*	3860*	3840	2280*	2280*	7498
0m	4360*	4360*	6180*	6180*	4840*	4840*	3990*	3790	2430*	2430*	7303
- 1.0m	6730*	6730*	6160*	6160*	4870*	4870*	3990*	3780	2660*	2660*	6958
- 2.0m	7590*	7590*	5870*	5870*	4680*	4680*	3750*	3750*	3040*	3040*	6438
- 3.0m			5240*	5240*	4120*	4120*			3600*	3600*	5455

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.00M T.A.B., REAR DOZER, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2580*	2580*	2650*	2650*	2180*	2130	6896
5.0m			2870*	2870*	2780*	2780*	2730*	2700	2080*	1880	7405
4.0m	3910*	3910*	3480*	3480*	3140*	3140*	2920*	2640	2040*	1730	7751
3.0m			4270*	4270*	3590*	3350	3190*	2560	2040*	1640	7956
2.0m			5080*	4390	4060*	3200	3480*	2470	2070*	1600	8030
1.0m			5720*	4190	4470*	3080	3740*	2400	2140*	1600	7977
0m	4660*	4660*	6090*	4070	4760*	2990	3940*	2340	2270*	1640	7794
- 1.0m	6340*	6210	6200*	4020	4880*	2950	4010*	2310	2460*	1740	7472
- 2.0m	7990*	6250	6060*	4020	4810*	2940	3920*	2310	2770*	1910	6991
- 3.0m	7290*	6340	5620*	4070	4460*	2980	3500*	2350	3110*	2220	6315



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.00M T.A.B., REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2580*	2580*	2650*	2650*	2180*	2180*	6896
5.0m			2870*	2870*	2780*	2780*	2730*	2730*	2080*	2080*	7405
4.0m	3910*	3910*	3480*	3480*	3140*	3140*	2920*	2920*	2040*	1970	7751
3.0m			4270*	4270*	3590*	3590*	3190*	2900	2040*	1870	7956
2.0m			5080*	5070	4060*	3660	3480*	2820	2070*	1820	8030
1.0m			5720*	4860	4470*	3540	3740*	2740	2140*	1820	7977
0m	4660*	4660*	6090*	4730	4760*	3450	3940*	2680	2270*	1870	7794
- 1.0m	6340*	6340*	6200*	4680	4880*	3400	4010*	2650	2460*	1980	7472
- 2.0m	7990*	7430	6060*	4680	4810*	3390	3920*	2650	2770*	2180	6991
- 3.0m	7290*	7290*	5620*	4730	4460*	3430	3500*	2690	3110*	2540	6315

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.00M T.A.B., FRONT DOZER, REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2580*	2580*	2650*	2650*	2180*	2180*	6896
5.0m			2870*	2870*	2780*	2780*	2730*	2730*	2080*	2080*	7405
4.0m	3910*	3910*	3480*	3480*	3140*	3140*	2920*	2920*	2040*	2040*	7751
3.0m			4270*	4270*	3590*	3590*	3190*	3190*	2040*	2040*	7956
2.0m			5080*	5080*	4060*	4060*	3480*	3480*	2070*	2070*	8030
1.0m			5720*	5720*	4470*	4470*	3740*	3510	2140*	2140*	7977
0m	4660*	4660*	6090*	6090*	4760*	4470	3940*	3440	2270*	2270*	7794
- 1.0m	6340*	6340*	6200*	6190	4880*	4420	4010*	3410	2460*	2460*	7472
- 2.0m	7990*	7990*	6060*	6060*	4810*	4410	3920*	3410	2770*	2770*	6991
- 3.0m	7290*	7290*	5620*	5620*	4460*	4450	3500*	3460	3110*	3110*	6315

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.00M T.A.B., FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS145W T.A.B.

Reach	3m		4m		5m		6m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm								
6.0m					2590*	2590*	2800*	2800*	2120*	2120*	6380
5.0m			2670*	2670*	2750*	2750*	2810*	2810*	2050*	2050*	6928
4.0m			3290*	3290*	3100*	3100*	2990*	2990*	2030*	2030*	7297
3.0m	5220*	5220*	4130*	4130*	3580*	3580*	3270*	3270*	2050*	2050*	7514
2.0m	6950*	6590*	5020*	5020*	4100*	4100*	3580*	3580*	2120*	2120*	7593
1.0m	7730*	7730*	5770*	5770*	4560*	4560*	3860*	3860*	2240*	2240*	7536
0m	7680*	7680*	6250*	6250*	4900*	4900*	4080*	3870	2430*	2430*	7342
- 1.0m	8720*	8720*	6430*	6430*	5060*	5000	4170*	3840	2720*	2720*	6999
- 2.0m	8400*	8400*	6320*	6320*	4990*	4990	4040*	3830	3190*	3190*	6483
- 3.0m	7680*	7680*	5850*	5850*	4580*	4580*			3720*	3720*	5746

 Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
 2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.
 4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 5.15M MONOBOOM, REAR DOZER, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		JS160W MONO
Load Point Ht.	kg	kg	kg	kg	kg	kg	mm						
7.5m					4360*	4360*					3830*	3830*	4620
6.0m					5080*	4470	3530*	2760			3330*	2740	6031
4.5m					5710*	4260	4890*	2730			3190*	2190	6838
3.0m					6740*	3940	5250*	2600			3230*	1940	7248
1.5m					7530*	3650	5580*	2470			3440*	1850	7330
0m			5580*	5580*	7600*	3510	5600*	2380			3880*	1910	7094
– 1.5m	6310*	6310*	9440*	6460	6950*	3490	5060*	2370			4400*	2150	6508
– 3.0m	8760*	8760*	7190*	6620	5360*	3580					4000*	2790	5454
– 4.5m			2810*	2810*							2280*	2280*	3524

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.15M MONOBOOM, REAR DOZER, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		JS160W MONO
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											2880*	2880*	5238
6.0m							4040*	2860			2580*	2460	6514
4.5m					5290*	4370	4610*	2780			2500*	2010	7266
3.0m			9710*	7300	6360*	4010	5040*	2630	3370*	1860	2540*	1800	7653
1.5m			5120*	5120*	7290*	3680	5450*	2480	4100*	1800	2690*	1710	7731
0m			6660*	6250	7590*	3480	5600*	2360	3080*	1750	3020*	1750	7508
– 1.5m	6070*	6070*	10140*	6280	7170*	3420	5280*	2320			3630*	1930	6957
– 3.0m	10160*	10160*	8130*	6430	5930*	3480					4020*	2400	5985
– 4.5m			4570*	4570*							3120*	3120*	4307

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 5.15M MONOBOOM, REAR DOZER, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		JS160W MONO
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											2400*	2400*	5690
6.0m							3840*	2860			2170*	2170	6881
4.5m							4350*	2780	2500*	1890	2110*	1840	7596
3.0m			8930*	7540	6020*	4060	4830*	2630	3790*	1840	2150*	1650	7967
1.5m			6790*	6590	7070*	3700	5300*	2460	4270	1760	2280*	1580	8041
0m			6950*	6270	7540*	3470	5540*	2340	4200	1710	2540*	1600	7828
– 1.5m	5610*	5610*	9860*	6240	7290*	3390	5350*	2280			3040*	1760	7301
– 3.0m	9050*	9050*	8780*	6350	6260*	3420	4430*	2310			3920*	2140	6383
– 4.5m	7560*	7560*	5630*	5630*	3860*	3600					3340*	3260	4849



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 5.15M MONOBOOM, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	mm						
7.5m					4360*	4360*					3830*	3830*	4620
6.0m					5080*	5080*	3530*	3260			3330*	3230	6031
4.5m					5710*	5050	4890*	3220			3190*	2590	6838
3.0m					6740*	4710	4980	3090			3230*	2310	7248
1.5m					7530*	4420	4830	2950			3440*	2220	7330
0m			5580*	5580*	7450	4260	4730	2860			3710	2290	7094
– 1.5m	6310*	6310*	9440*	8090	6950*	4240	4720	2850			4200	2570	6508
– 3.0m	8760*	8760*	7190*	7190*	5360*	4340					4000*	3350	5454
– 4.5m			2810*	2810*							2280*	2280*	3524

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.15M MONOBOOM, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											2880*	2880*	5238
6.0m							4040*	3350			2580*	2580*	6514
4.5m					5290*	5160	4610*	3280			2500*	2380	7266
3.0m			9710*	9010	6360*	4790	5030	3120	3370*	2210	2540*	2140	7653
1.5m			5120*	5120*	7290*	4440	4850	2960	3460	2150	2690*	2050	7731
0m			6660*	6660*	7420	4230	4720	2850	3080*	2110	3020*	2100	7508
– 1.5m	6070*	6070*	10140*	7900	7170*	4170	4670	2810			3630*	2320	6957
– 3.0m	10160*	10160*	8130*	8060	5930*	4240					4020*	2890	5985
– 4.5m			4570*	4570*							3120*	3120*	4307

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 5.15M MONOBOOM, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	mm						
7.5m											2400*	2400*	5690
6.0m							3840*	3360			2170*	2170*	6881
4.5m							4350*	3270	2500*	2250	2110*	2110*	7596
3.0m			8930*	8930*	6020*	4840	4830*	3120	3510	2190	2150*	1980	7967
1.5m			6790*	6790*	7070*	4470	4840	2950	3430	2120	2280*	1800	8041
0m			6950*	6950*	7430	4230	4649	2820	3360	2060	2540*	1940	7828
– 1.5m	5610*	5610*	9860*	7860	7290*	4140	4620	2760			3040*	2120	7301
– 3.0m	9050*	9050*	8780*	7990	6260*	4170	4430*	2790			3920*	2590	6383
– 4.5m	7560*	7560*	5630*	5630*	3860*	3860*					3340*	3340*	4849



Lift capacity front and rear.



Lift capacity full circle.

Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 5.15M MONOBOOM, FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		JS160W MONO
Load Point Ht.	kg	kg	kg	kg	kg	mm							
7.5m					4360*	4360*					3830*	3830*	4620
6.0m					5080*	5080*	3530*	3530*			3330*	3330*	6031
4.5m					5710*	5710*	4890*	4110			3190*	3090*	6838
3.0m					6740*	6160	5250*	3970			3230*	2980	7248
1.5m					7530*	5830	5580*	3830			3440*	2870	7330
0m			5580*	5580*	7600*	5670	5600*	3740			3880*	2970	7094
– 1.5m	6310*	6310*	9440*	9440*	6950*	5650	5060*	3730			4400*	3350	6508
– 3.0m	8760*	8760*	7190*	7190*	5360*	5360*					4000*	4000*	5454
– 4.5m			2810*	2810*							2280*	2280*	3524

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.15M MONOBOOM, FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		JS160W MONO
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											2880*	2880*	5238
6.0m							4040*	4040*			2580*	2580*	6514
4.5m					5290*	5290*	4610*	4170			2500*	2500*	7266
3.0m			9710*	9710*	6360*	6240	5040*	4010	3370*	2850	2540*	2540*	7653
1.5m			5120*	5120*	7290*	5860	5450*	3840	4100*	2780	2690*	2660	7731
0m			6660*	6660*	7590*	5640	5600*	3720	3080*	2740	3020*	2730	7508
– 1.5m	6070*	6070*	10140*	10140*	7170*	5570	5280*	3680			3630*	3030	6957
– 3.0m	10160*	10160*	8130*	8130*	5930*	5640					4020*	3770	5985
– 4.5m			4570*	4570*							3120*	3120*	4307

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 5.15M MONOBOOM, FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		JS160W MONO
Load Point Ht.	kg	kg	mm										
7.5m											2400*	2400*	5690
6.0m							3840*	3840*			2170*	2170*	6881
4.5m							4350*	4170	2500*	2500*	2110*	2110*	7596
3.0m			8930*	8930*	6020*	6020*	4830*	4010	3790*	2830	2150*	2150*	7967
1.5m			6790*	6790*	7070*	5900	5300*	3830	4330*	2750	2280*	2280*	8041
0m			6950*	6950*	7540*	5640	5540*	3700	4320*	2690	2540*	2530	7828
– 1.5m	5610*	5610*	9860*	9860*	7290*	5540	5350*	3630			3040*	2780	7301
– 3.0m	9050*	9050*	8780*	8780*	6260*	5580	4430*	3670			3920*	3380	6383
– 4.5m	7560*	7560*	5630*	5630*	3860*	3860*					3340*	3340*	4849



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 5.15M MONOBOOM, FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	mm							
7.5m					4360*	4360*					3830*	3830* 4620
6.0m					5080*	5080*	3530*	3530*			3330*	3330* 6031
4.5m					5710*	5710*	4890*	4670			3190*	3190* 6838
3.0m					6740*	6740*	5250*	4520			3230*	3230* 7248
1.5m					7530*	6750	5580*	4380			3440*	3270 7330
0m			5580*	5580*	7600*	6580	5600*	4280			3880*	3390 7094
– 1.5m	6310*	6310*	9440*	9440*	6950*	6550	5060*	4270			4400*	3830 6508
– 3.0m	8760*	8760*	7190*	7190*	5360*	5360*					4000*	4000* 5454
– 4.5m			2810*	2810*							2280*	2280* 3524

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.15M MONOBOOM, FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											2880*	2880* 5238
6.0m							4040*	4040*			2580*	2580* 6514
4.5m					5290*	5290*	4610*	4610*			2500*	2500* 7266
3.0m			9710*	9710*	6360*	6360*	5040*	4570	3370*	3240	2540*	2540* 7653
1.5m			5120*	5120*	7290*	6780	5450*	4390	4100*	3170	2690*	2690* 7731
0m			6660*	6660*	7590*	6550	5600*	4270	3080*	3080	3020*	3020 7508
– 1.5m	6070*	6070*	10140*	10140*	7170*	6480	5280*	4220			3630*	3460 6957
– 3.0m	10160*	10160*	8130*	8130*	5930*	5930*					4020*	4020* 5985
– 4.5m			4570*	4570*							3120*	3120* 4307

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 5.15M MONOBOOM, FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	mm										
7.5m											2400*	2400* 5690
6.0m							3840*	3840*			2170*	2170* 6881
4.5m							4350*	4350*	2500*	2500*	2110*	2110* 7596
3.0m			8930*	8930*	6020*	6020*	4830*	4560	3790*	3220	2150*	2150* 7967
1.5m			6790*	6790*	7070*	6820	5300*	4380	4330*	3140	2280*	2280* 8041
0m			6950*	6950*	7540*	6550	5540*	4240	4320*	3070	2540*	2540* 7828
– 1.5m	5610*	5610*	9860*	9860*	7290*	6450	5350*	4180			3040*	3040* 7301
– 3.0m	9050*	9050*	8780*	8780*	6260*	6260*	4430*	4210			3920*	3880 6383
– 4.5m	7560*	7560*	5630*	5630*	3860*	3860*					3340*	3340* 4849

 Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 4.97M T.A.B., REAR DOZER, NO BUCKET.

Reach	1.5m	3m	4.5m	6m	7.5m	Capacity at Max Reach	JSI60W T.A.B.
Load Point Ht.	kg	kg	kg	kg	kg	kg	mm
7.5m						4240*	4240*
6.0m			4690*	4560		3510*	2810
4.5m		6720*	6720*	5250*	4360	3270*	2230
3.0m			6270*	4020	4990*	2630	3230*
1.5m			7190*	3700	5390*	2480	3350*
0m		5340*	5340*	7530*	3520	5540*	2390
– 1.5m		10110*	6460	7130*	3500	5140*	2380
– 3.0m			5670*	3610			4330*
						5100*	3240
							4882

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.97M T.A.B., REAR DOZER, NO BUCKET.

Reach	1.5m	3m	4.5m	6m	7.5m	Capacity at Max Reach	JSI60W T.A.B.
Load Point Ht.	kg	kg	kg	kg	kg	kg	mm
7.5m			4410*	4410*		3120*	3120*
6.0m			4240*	4240*	4170*	2880	2700*
4.5m			4820*	4480	4330*	2820	2550*
3.0m		8730*	7550	5870*	4110	4750*	2670
1.5m			6900*	3730	5220*	2500	3200*
0m		6410*	6280	7430*	3500	5490*	2380
– 1.5m		10500*	6290	7270*	3430	5330*	2330
– 3.0m		8830*	6460	6230*	3500		
						4150*	2480
							5913

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 4.97M T.A.B., REAR DOZER, NO BUCKET.

Reach	1.5m	3m	4.5m	6m	7.5m	Capacity at Max Reach	JSI60W T.A.B.
Load Point Ht.	kg	kg	kg	kg	kg	kg	mm
7.5m						2580*	2580*
6.0m				3860*	2900	2270*	2250
4.5m			4440*	4440*	4050*	2820	6831
3.0m		7950*	7800	5520*	4150	4520*	2430*
1.5m		6890*	6730	6650*	3760	5040*	1880
0m		6710*	6310	7320*	3500	5400*	2150*
– 1.5m	5120*	5120*	9850*	6250	7330*	5370*	1860
– 3.0m		9410*	6380	6530*	3430	4540*	1840
						2230*	1660
						1770	1590
						1710	1590
						2420*	1620
						2800*	1790
						3590*	2200
							6329



Lift capacity front and rear.



Lift capacity full circle.

Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 4.97M T.A.B., REAR STABILISERS, NO BUCKET.

JS160W T.A.B.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											4240*	4240*
6.0m					4690*	4690*					3510*	3330
4.5m			6720*	6720*	5250*	5170	4630*	3260			3270*	2660
3.0m					6270*	4810	4990*	3130			3230*	2360
1.5m					7190*	4480	4930	2980			3350*	2260
0m			5340*	5340*	7530*	4300	4820	2890			3670*	2340
- 1.5m			10110*	8130	7130*	4270	4810	2880			4330*	2650
- 3.0m					5670*	4390					5100*	3920
												4882

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.97M T.A.B., REAR STABILISERS, NO BUCKET.

JS160W T.A.B.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m					4410*	4410*					3120*	3120*
6.0m					4240*	4240*	4170*	3400			2700*	2700*
4.5m					4820*	4820*	4330*	3330			2550*	2430
3.0m			8730*	8730*	5870*	4910	4750*	3180	3200*	2220	2530*	2170
1.5m					6900*	4520	4960	3000	3520	2160	2630*	2090
0m			6410*	6410*	7430*	4280	4810	2870			2870*	2140
- 1.5m			10500*	7950	7270*	4200	4760	2830			3340*	2380
- 3.0m			8830*	8140	6230*	4280					4150*	2990
												5913

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 4.97M T.A.B., REAR DOZER, NO BUCKET.

JS160W T.A.B.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	mm						
7.5m											2580*	2580*
6.0m							3860*	3420			2270*	2270*
4.5m					4440*	4440*	4050*	3340	2430*	2250	2150*	2150*
3.0m			7950*	7950*	5520*	4960	4520*	3180	3580	2210	2140*	2000
1.5m			6890*	6890*	6650*	4550	4950	2990	3490	2130	2230*	1920
0m			6710*	6710*	7320*	4280	4790	2850	3430	2070	2420*	1970
- 1.5m	5120*	5120*	9850*	7920	7330*	4170	4710	2780			2800*	2170
- 3.0m			9410*	8050	6530*	4210	4540*	2830			3590*	2660
												6329



Lift capacity front and rear.



Lift capacity full circle.

Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 4.97M T.A.B., FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											4240*	4240*
6.0m					4690*	4690*					3510*	3510*
4.5m			6720*	6720*	5250*	5250*	4630*	4180			3270*	3270*
3.0m					6270*	6270*	4990*	4040			3230*	3050
1.5m					7190*	5940	5390*	3890			3350*	2950
0m			5340*	5340*	7530*	5750	5540*	3790			3670*	3060
- 1.5m			10110*	10110*	7130*	5710	5140*	3780			4330*	3470
- 3.0m					5670*	5670*					5100*	5100*
												4882

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.97M T.A.B., FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m					4410*	4410*					3120*	3120*
6.0m					4240*	4240*	4170*	4170*			2700*	2700*
4.5m					4820*	4820*	4330*	4260			2550*	2550*
3.0m			8730*	8730*	5870*	5870*	4750*	4090	3200*	2880	2530*	2530*
1.5m					6900*	5980	5220*	3910	3880*	2810	2630*	2630*
0m			6410*	6410*	7430*	5720	5490*	3770			2870*	2800
- 1.5m			10500*	10500*	7270*	5640	5330*	3730			3340*	3110
- 3.0m			8830*	8830*	6230*	5720					4150*	3910
												5913

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 4.97M T.A.B., FRONT DOZER, REAR STABILISERS, NO BUCKET.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach	
Load Point Ht.	kg	mm										
7.5m											2580*	2580*
6.0m							3860*	3860*			2270*	2270*
4.5m					4440*	4440*	4050*	4050*	2430*	2430*	2150*	2150*
3.0m			7950*	7950*	5520*	5520*	4520*	4090	3790*	2870	2140*	2140*
1.5m			6890*	6890*	6650*	6020	5040*	3900	4210*	2790	2230*	2230*
0m			6710*	6710*	7320*	5730	5400*	3750	4210*	2720	2420*	2420*
- 1.5m	5120*	5120*	9850*	9850*	7330*	5610	5370*	3680			2800*	2800*
- 3.0m			9410*	9410*	6530*	5650	4540*	3730			3590*	3490
												6329



Lift capacity front and rear.



Lift capacity full circle.

Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 4.97M T.A.B., FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS160W T.A.B.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m											4240*	4240*	4492
6.0m					4690*	4690*					3510*	3510*	5935
4.5m			6720*	6720*	5250*	5250*	4630*	4630*			3270*	3270*	6753
3.0m					6270*	6270*	4990*	4610			3230*	3230*	7168
1.5m					7190*	6880	5390*	4450			3350*	3350*	7251
0m			5340*	5340*	7530*	6680	5540*	4340			3670*	3490	7013
- 1.5m			10110*	10110*	7130*	6640	5140*	4330			4330*	3970	6419
- 3.0m					5670*	5670*					5100*	5100*	4882

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.97M T.A.B., FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS160W T.A.B.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m					4410*	4410*					3120*	3120*	5155
6.0m					4240*	4240*	4170*	4170*			2700*	2700*	6448
4.5m					4820*	4820*	4330*	4330*			2550*	2550*	7207
3.0m			8730*	8730*	5870*	5870*	4750*	4660	3200*	3200*	2530*	2530*	7597
1.5m					6900*	6900*	5220*	4470	3880*	3210	2630*	2630*	7657
0m			6410*	6410*	7430*	6660	5490*	4330			2870*	2870*	7451
- 1.5m			10500*	10500*	7270*	6570	5330*	4290			3340*	3340*	6895
- 3.0m			8830*	8830*	6230*	6230*					4150*	4150*	5913

LIFT CAPACITIES – DIPPER LENGTH: 3.05M, 4.97M T.A.B., FRONT STABILISERS, REAR STABILISERS, NO BUCKET.

JS160W T.A.B.

Reach	1.5m		3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	mm										
7.5m											2580*	2580*	5629
6.0m							3860*	3860*			2270*	2270*	6831
4.5m					4440*	4440*	4050*	4050*	2430*	2430*	2150*	2150*	7551
3.0m			7950*	7950*	5520*	5520*	4520*	4520*	3790*	3260	2140*	2140*	7924
1.5m			6890*	6890*	6650*	6650*	5040*	4460	4210*	3180	2230*	2230*	7998
0m			6710*	6710*	7320*	6660	5400*	4310	4210*	3126	2420*	2420*	7784
- 1.5m	5120*	5120*	9850*	9850*	7330*	6540	5370*	4240			2800*	2800*	7254
- 3.0m			9410*	9410*	6530*	6530*	4540*	4290			3590*	3590*	6329



Lift capacity front and rear.



Lift capacity full circle.

Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.



ONE COMPANY, OVER 300 MACHINES.

Your nearest JCB dealer

Wheeled Excavator JS145W/JS160W

Engine power: 93kW (125hp) Bucket capacity: 0.265 – 0.995m³

Operating weight: 14,175 – 18,218kg

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: salesinfo@jcb.com

Download the very latest information on this product range at: www.jcb.com

9999/5775 05/14 en-GB Issue 1 (T4i)

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer."JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



WORLD
LAND
TRUST™
www.carbonbalancedpaper.com
unique print number



Mixed Sources
Proceeds from sales help
protect native forests and other controlled sources
www.fsc.org Cert no. TS-COF-02291
© 1996 Forest Stewardship Council

